


NF-C3 Surface Mount Metal Infrared Exit Button Use Manual

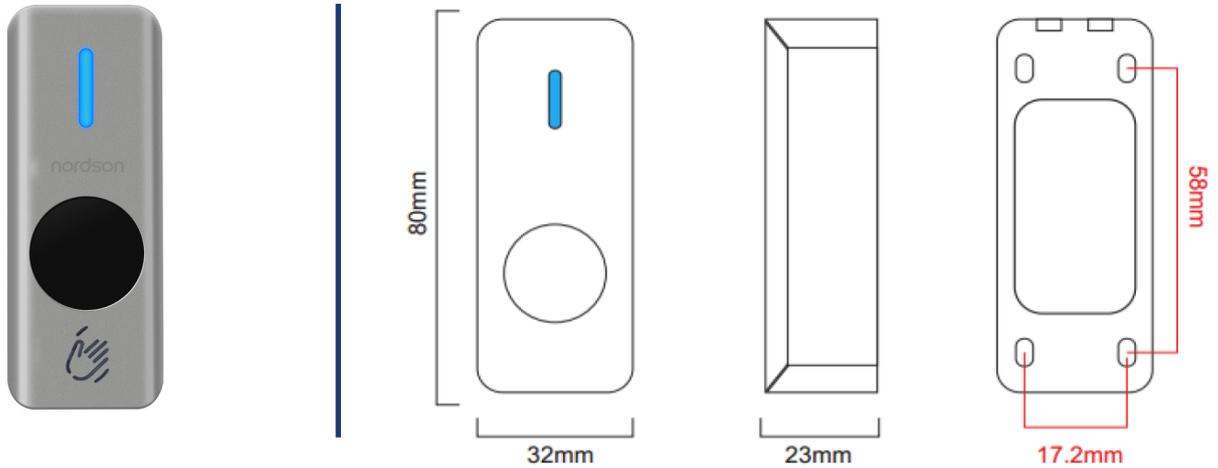


Product Features & Technical Specifications

NO/NC/COM Single pole architrave switch with LED Status

- Sensor: infrared adjustable 3-15cm
- Input Power: 12-24vdc
- Contact Rating: 24vdc 2A
- Output Contact: Single Pole NO/NC/COM
- Mechanical Life – 500,000
- IP rating: IP68 Optional
- Surface mount
- Operating temperature: -20°C to 55°C
- Operating humidity: 0-95%
- LED Status
 - Blue** = Standby
 - Green** = Activated


Power Supply & Connections

A permanent 12-24 VDC supply is required to operate the touchless series of Exit Buttons.

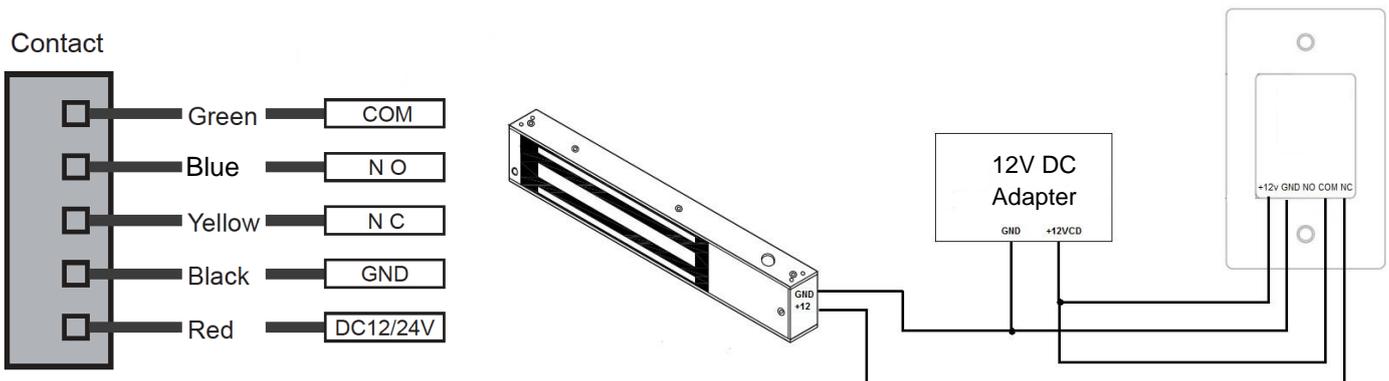

Activation Distance

The Exit button has sensitivity adjustment from 3-15cm this can be adjusted as follows:



Activation Distance

-  Turn left to reduce activation distance
-  Turn right to increase activation distance



Note: DO NOT face the infrared sensor directly into the sunlight, as this will affect the performance of the unit.